

Installation Guide

CLS DB Island



Cleaning Products should be rinsed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Tools Drill, hammer, screwdriver, two 100mm bolts, two plugs



Manufacturing Standard (as applicable)
All LEAFIELD Environmental products are manufactured to BS EN ISO 9002.
Plastic materials: Mechanical properties tested to BS 2782 Hot dipped galvanised: BS 729 Powder coating: BS 3900 Zinc coating: BS 1706




PPE Always wear appropriate PPE equipment and follow safety guidelines.



The CLS DB Island base is fixed using two 100mm bolts.



Place base on intended area.

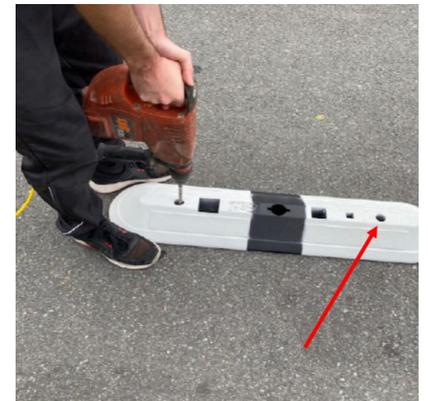

Drill two guide holes using base as a template.



Post
Leaffield Way, Leaffield Industrial Estate
Corsham, Wiltshire, SN13 9UD



Telephone
01225 816500



Fax
01225 816501



Website
www.leaffield-environmental.com





Use a hammer to place the two plugs into the holes.



Place base back on site lining up the holes.



Screw the bolts into place.



Push CLS DB Island sign into aperture insert.



Twist clockwise to secure.



Installation complete.



Post
Leaffield Way, Leaffield Industrial Estate
Corsham, Wiltshire, SN13 9UD



Telephone
01225 816500



Fax
01225 816501



Website
www.leaffield-environmental.com

