


Fixed Bollard 750mm Above Ground 60mm - 193mm Diameter Galvanised - Concrete In

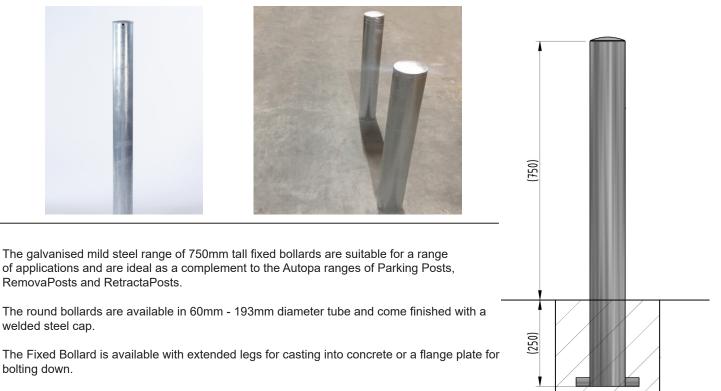

Removable and colour coated versions also available extra.

Part Number	<u>Diameter</u>	<u>Weight (kg</u>
138 121 101	60mm Galvanised	4kg
138 121 253	76mm Galvanised	5kg
138 121 283	90mm Galvanised	6kg
138 121 323	101mm Galvanised	7kg
138 121 423	114mm Galvanised	8kg
138 121 553	127mm Galvanised	9kg
138 121 623	139mm Galvanised	17kg
138 121 674	152mm Galvanised	11kg
138 121 723	168mm Galvanised	20kg
138 121 783	193mm Galvanised	23kg

Product details

- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm and 193mm
- Concrete in 250mm (below ground)

Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

